




MCON SUPER HACK

SPECIALITY POLYMER LATEX THAT
ELIMINATES NEED FOR HACKING

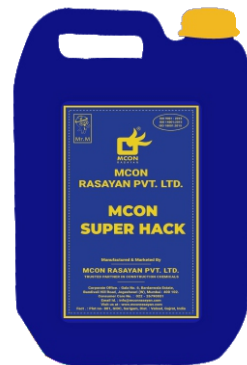

Product Description :-

MCON SUPER HACK is a unique single component liquid bonding agent for plaster that strengthens the bond between the plaster and concrete. MCON SUPER HACK is an efficient and cost-effective product. This product is a customized solution that completely eliminates the need to hack concrete surfaces that will receive plaster.


Features & Benefits :-

- Eliminates need for Hacking. Thus saves on effort and labour cost.
- Avoids damage to structure, as it is chloride free.
- Provides excellent bonding between plaster (mortar / gypsum) and concrete.
- Suitable for interior and exterior application.

Areas of Application :-



Concrete Surface



Old Plastered Surfaces

Technical Specification :-

Appearance	Milky White Liquid
Specific Gravity	1.00 ± 0.005
Standard	ASTM E 149
Pull out strength of Mortar to Concrete	
Bond Strength	7 days > 0.20 Mpa
Bond Strength	28 days > 0.50 Mpa
Solid Content	40 - 41 %




READY MIX MORTAR



MCON SUPER HACK

SPECIALITY POLYMER LATEX THAT
ELIMINATES NEED FOR HACKING

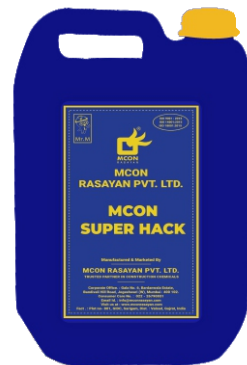

Easy To Apply :-

Surface Preparation :-

- Concrete surface for treatments must be thoroughly cleaned of all laitance, loose materials, oils, grease etc.

Application of Mortar Plaster :-

- Moisten the surface with clean water and remove excess surface water. Apply single coat of MCON SUPER HACK by brush / roller or spray on pretested surface.
- When the bond coat becomes tacky (1/2 Hour to 8 hours, apply the chat coat (dash coat) of plaster.
- Allow the chat coat (dash coat) to dry for 24 hours and then apply the plaster to finish work.

Application of Gypsum Plaster :-

- Moisten the surface with clean water and remove excess surface water. Apply single coat of MCON SUPER HACK by brush / roller or spray on pretested surface.
- When the bond coat becomes tacky, apply the gypsum plaster with trowel to desire thickness.



Coverage :-

80 - 90 Sq.ft per Kg
for Single Coat



Packing :-

5 & 20 Kgs

Shelf Life :-

- 12 months from manufacture in original unopened bucket if stored in dry conditions.

Safety & Precautions :-

- Recommended use of hand gloves, goggles & masks.
- In case of eye or skin contamination, wash well with soap & cold water.
- Seek medical advice as necessary.

An ISO 9001 : 2015 - An ISO 14001 : 2015 - AN BS OHSAS 45001 : 2018

MCON RASAYAN PVT. LTD.

Trusted Partner In Construction Chemicals

Corporate Office : Gala No. 6 , Bardanwala Estate , Bandivali Hill Road , Jogeshwari (W) , Mumbai - 400 102 , Maharashtra , India .

Consumer Care : 022 - 26790031 • Email Id : info@mconrasayan.com • Visit us : www.mconrasayan.com • Follow Us :   